
Qwicke°





Quicke's loader range for your compact tractor

100C 140C 160C 180C

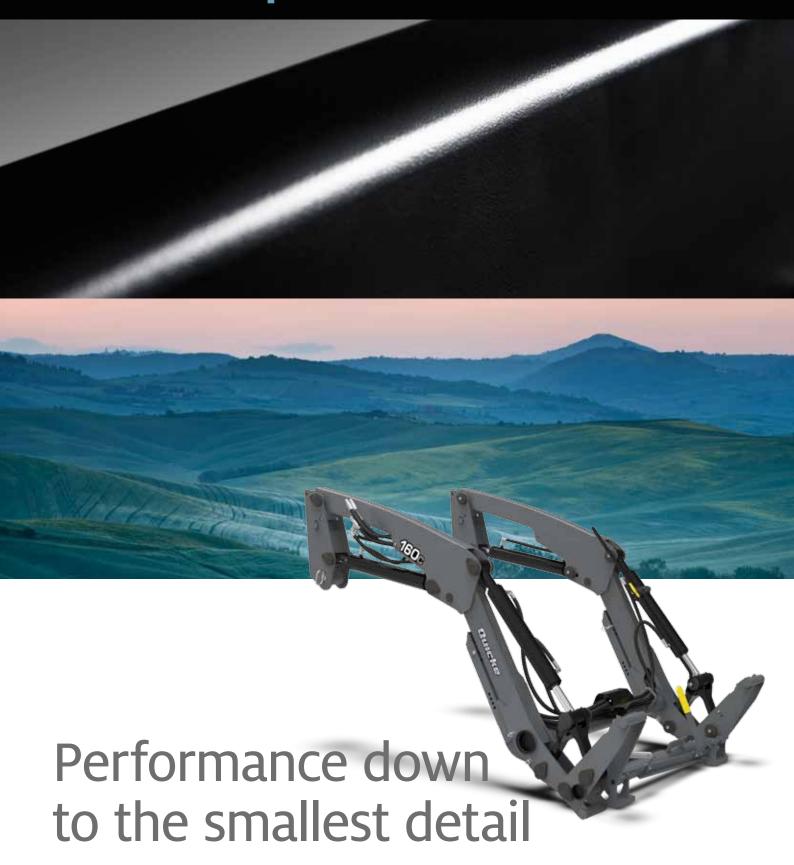







 $\mathbf{1}\mid$ COMPACT AND RELIABLE LOADER BEAM DESIGN.



 $2\mid$ SMOOTH, INTEGRATED SUPPORT LEGS.



 $^{\rm 3}\mid$ QUICK AND SIMPLE TO CONNECT AND DISCONNECT.



 $\boldsymbol{4} \mid \text{STRONG PINS AND SMART LOCKING.}$



 $\mathbf{5} \mid$ CROSS TUBE IN UNIQUELY LOW POSITION.



6 | PROTECTIVE HOSE COVER.

Make your tractor much more productive – your own satisfaction guaranteed!

Made by professionals, for professionals. A very apt way of summing up Quicke's Compact loaders, and something that shows no matter what the job is.

Management and maintenance of farms, crops, golf courses, public parks, green spaces, the list goes on: regardless of what you are using your compact tractor for, this loader raises the bar considerably for what you can and will achieve, thanks to the many special benefits which you only get from Quicke.

Take for example the optimum view, optimised because of the cross tube's unique low position, or the high level of operational reliability with securely protected hydraulics inside the loader beam, not forgetting the servicing process, made simple thanks to the caps above all the pins, all of which can be opened. There are many more examples, but all point to the same thing: choose Quicke if you want to make the most of your compact tractor!

- 1 | COMPACT AND RELIABLE LOADER BEAM DESIGN. A benefit so typical of Quicke. All the essential parts of the hydraulics are securely protected inside the loader beam, which minimises the risk of injury and damage. Of course, this design also enhances the view.
- 2 | THE SMOOTH, INTEGRATED SUPPORT LEGS make Quicke Compact extremely easy to connect and disconnect.
- 3 | QUICK AND SIMPLE TO CONNECT AND DISCONNECT. You do not need any tools to connect and disconnect your Compact loader.
- 4 | STRONG PINS AND SMART LOCKING. All the pins on Quicke Compact are zinc-coated, and can also be lubricated. Note also the pin locking system unique to Quicke, which prevents the pins from rotating.

- **POSITION.** A design solution exclusive to Quicke! The extra low cross tube on the Quicke Compact means that you always have a full view of the implement. Driving is also optimised from a safety point of view because the front lights are not hidden or covered.
- 6 | PROTECTIVE HOSE COVER. The hose cover protects the hoses from dirt, wear-and-tear, sunlight, etc. and also holds the hoses together, which in turn improves the view. The hose cover is standard on all Quicke Compact loaders.









1 | MODERN, HIGH-PERFORMANCE DESIGN.



 $\mathbf{2}\mid$ TOOL CARRIERS PROVIDING OPTIMUM VIEW.



3 | PIN-FIXING FOR IMPLEMENTS FOR 100C AND 140C.



 $\mathbf{4}\mid$ QUICK ATTACH TOOL CARRIER FOR 160C AND 180C.



5 | FULL CONTROL OF YOUR IMPLEMENTS.



6 | MODERN MANUFACTURING, QUALITY GUARANTEED.



 $\boldsymbol{7}\mid$ SIMPLE SERVICING SAVES YOU TIME.



1 | MODERN, HIGH-PERFORMANCE

DESIGN. An essential part of Quicke Compact. The gently rounded loader beam which matches the curve of the tractor's bonnet is one example of this, while another example is the strong and robust bearing box – its slim design providing the best view possible.

 $\mathbf{2} \mid$ TOOL CARRIERS PROVIDING OPTIMUM

VIEW. A typical and unique Quicke benefit. The "open" design of the tool carrier on our two largest Quicke Compact models will give you an superb view of, as well as total control of, the implement when you are using pallet forks, for example.

- 3 | PIN-FIXING FOR IMPLEMENTS FOR 100C AND 140C. "Pin-on" means that the loader has a bucket fitted directly to the loader. In other words, pin-on loaders have no tool carrier (unlike the two largest models in the Quicke Compact range). The bucket is high quality, designed for the loader and included in the price.
- 4 | QUICK ATTACH TOOL CARRIER FOR 160C AND 180C. The tool carrier on the two largest Quicke Compact models provides benefits such as an superb view of the implement, a helpful quick-connection function, and an excellent crowd angle.
- **5 | FULL CONTROL OF YOUR IMPLEMENTS.**

The implement indicator supplied with the two largest models means that you can always keep control of the implement's angle from the ground. It can be fitted on either the right or the left-hand side and is very simple to adjust.

6 | MODERN MANUFACTURING, QUALITY GUARANTEED. Nothing is left to chance when we make the Quicke Compact. The production process uses modern technology and stringent quality assurance checks the whole way through – from the selection of materials to the final powder coating.

7 | SIMPLE SERVICING SAVES YOU TIME.

When you lubricate and pressure wash Quicke Compact, the plastic caps on the pins ensure that the grease does not contaminate the paint or windscreen.

8 | MARKET-LEADING LOAD DAMPENING.

An option for the two largest models which give you optimum load handling, good ergonomics and driver comfort. The load dampening also reduces strain and stress on the loader, subframe, tractor and driver. This function is easy to activate, with a mechanical on/off switch located on the bearing box.

- **9** | **3RD SERVICE.** An option for the two largest models which further increase the benefits provided by the tractor and mean that you can achieve even more with your loader and tractor, e.g. when using implements with grip function.
- 10 | GREATER EFFICIENCY THANKS TO
 PARALLEL LINKAGE. An option for the two
 largest models which provide even more power
 and greater work speed. The pallet fork is
 always in the correct position, from the ground
 up to maximum height. Likewise, if you change
 to the bucket, you will obtain the same exact
 parallel linkage without having to make any

adjustments to the loader.



8 | MARKET-LEADING LOAD DAMPENING.



9 | 3RD SERVICE.



10 | GREATER EFFICIENCY THANKS TO PARALLEL LINKAGE.





Parallel loaders

	100C	140C
Working angles*, max. crowd angle4	30°	23°
max. dump angle⁵	51°	50°
Lift heigh, metres at pivot pin metres under level implement ^{6*}	1.90 m	2.42 m
Lifting force at pivot pin Lifting force at pivot pin Max. rollback force soo mm from pivot pin	1.76 m	2.23 m
Lifting force	130 bar	140 bar
1. at pivot pin, ground level** at pivot pin, max. lift height**	490 kg 300 kg	700 kg 460 kg
2. 500 mm from pivot pin, ground level	340 kg	510 kg
500 mm from pivot pin, 1.5 m lift height (100c 1.0 m)	270 kg	410 kg
500 mm from pivot pin, max. lift height	210 kg	330 kg
3. Max. rollback force 50 cm from pivot pin	930 kg	1,050 kg
Loader weight	175 kg	210 kg
Tractor size	Approx. <20 hp /15 kW	Approx. 20-40 hp /15-30 kW
Recommended tractor weight	600 kg	1,000 kg
GENERAL PROPERTIES	_	_
Curved loader beam which matches the curve of the tractor's bonnet		-
Design properties found in all Quicke loaders		
FUNCTIONAL PROPERTIES	-	-
Support legs integrated into the loader beam	-	
Hydraulics securely protected inside loader beams	-	-
No tools required to connect and disconnect your loader		
Implement indicator		
DESIGN Child Change to all common		
Skid Steer tool carrier		
Euro tool carrier	width 4 par mm valumes a 46 m³	width: 4 690 mm volume: 0.49 m³
Pin-on bucket	width: 1,225 mm, volume: 0.16 m ³	width: 1,680 mm, volume: 0.18 m ³
4-point link		-
Style pins for strength, reliability and easy greasing access Hose cover		
OPTIONS (AFTER SALE FIT)	_	_
Parallel linkage kit (mechanical)		
3rd service		
Load dampening		

^{*}Varies depending on each implement. **In addition to engine strength, the tractor's weight and size influence your choice of loader.

Pin-on.

EURO or Skid Steer implement attachment.

1000	1800
40° 52°	38° 53°
2.61 m 2.38 m	2.81 m 2.59 m
m 3 2 1 3 2 2 1 3 2 2 1 3 2 2 1 3 3 2 2 1 3 2 2 1 3 2 2 2 1 3 3 2 2 2 1 3 3 2 2 2 1 3 3 2 2 2 1 3 3 2 2 2 2	2 2 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
140 bar 1,060 kg 710 kg	172 bar 1,830 kg 1,150 kg
780 kg 640 kg 500 kg	1,370 kg 1,110 kg 840 kg
1,290 kg	2,610 kg
240 kg	280 kg
Approx. 20-40 hp /15-30 kW	Approx. 40-60 hp /30-45 kW
1,250 kg	1,800 kg
	•
_	_
•	
_	
_	_
-	-
-	-

18oC

16oC







Exactly the implement you need

The right implement for all situations is a prerequisite for you to obtain even greater use and enjoyment from your loader and tractor.

With the widest range on the market, it is easy to find exactly the implement you need. In addition, when you choose our original implements you can be safe in the knowledge that you have the best and most effective equipment on the market. Highest quality down to the smallest detail. All you need to think about is matching the implement to the implement carrier you have on your loader, EURO or Skid Steer. The following pages contains a summary of all of the implements available for the Compact loader. Please note that the implements are mainly intended for use with our two largest loader models. The two smallest loaders are supplied with a Pin-on bucket.




Silograb®

UNUSUALLY STRONG AND EFFECTIVE

Silograb is an extremely versatile implement. The close spacing of the tines practically eliminates the spilling of silage. The tines are mounted in a box section with welded sleeves. The tines make a circular motion through the material, which produces the cleanest cut, the least power requirement and the longest service life for the tines. In addition, the material is pressed against the back of the implement when the tines are lowered, keeping the silage in place even when driving over uneven terrain.







Pallet forks

MAXIMUM DURABILITY AND STABILITY

The upper support of the backframe is made in one piece. The beam has holes for lateral adjustment and provides secure positioning of the forks. The load is distributed over a large area thanks to the large load-bearing surfaces of the forks. This special design gives you a stable fork that never tilts or wobbles. Naturally, the forks are designed with a wide margin of safety in mind.







1000 kg
140 97/122
94 1000
forgings 155/163





Series C

ROBUST AND EFFECTIVE

		-
SERIES C WITH IMPLEMENT CARRIER	170C	180C
Width, cm Depth, cm Height, cm	170 67 61	180 67 61
Volume (heaped), m³ Cutting edge WxT*, mm Weight, kg	0,44 100x15 123	0,49 100x15 128

SERIES C WITH PIN-ON	120C	140C	170C	
Width, cm	120	140	170	
Depth, cm	49	49	67	
Height, cm	42	42	61	
Volume (heaped), m ³	0,16	0,18	0,45	
Cutting edge WxT*, mm	100x15	100x15	100x15	
Weight, kg	63	69	117	

Bale spike

SIMPLE AND EFFECTIVE


BALE SPIKE	130
Width, cm	115
Tine length, cm	125
Weight, kg	60

Manure fork


MORE STABLE AND MORE RESILIENT

MANUREFORK	130	150
Width, cm	130	150
Depth, cm	85	85
Number of tines	7	8
Weight, kg	123	136





THE PERFECT ALL-ROUND IMPLEMENT



The closed bottom piece of the bucket ensures that all the material is always completely gathered up. Multibenne, designed according to the same principles as Silograb, can handle many different types of fodder, and manure as well. Therefore you need not change implements when feeding your animals.



MULTIBENNE	130
Width, cm	130
Depth, cm	80
Volume, m ³	0,66
Number of tines in the grabber	7
Weight, kg	280





Unigrip™

PROVEN ADVANTAGES IN DESIGN AND LIGHT WEIGHT

Unigrip has well proven design and a low net weight. It is used for the same tasks as Flexigrip. The choice between these two implements depends on the work routines of the individual user. Unigrip is also well suited for smaller square bales. The implement arms distribute the pressure evenly over a large area, and this ensures careful handling of the bales. Unigrip gripping arms are made of large diameter tubes and have no sharp edges or welded joints. This prevents the plastic round the bales from being damaged.



UNIGRIP	130
For bale sizes, min-max, cm	90-130
Weight, kg	200



www.quicke.ru



- официальный Дистрибьютор QUICKE в России

Россия. 123317. Москва. ММДЦ Москва-Сити. Пресненская Набережная 10С, 4-й этаж Тел: +7 (495) 775 0175, 775 0176, 775 6975 Факс: +7 (495) 967 7600 E- mail: info@most-technics.ru Http: www.most-technics.ru